

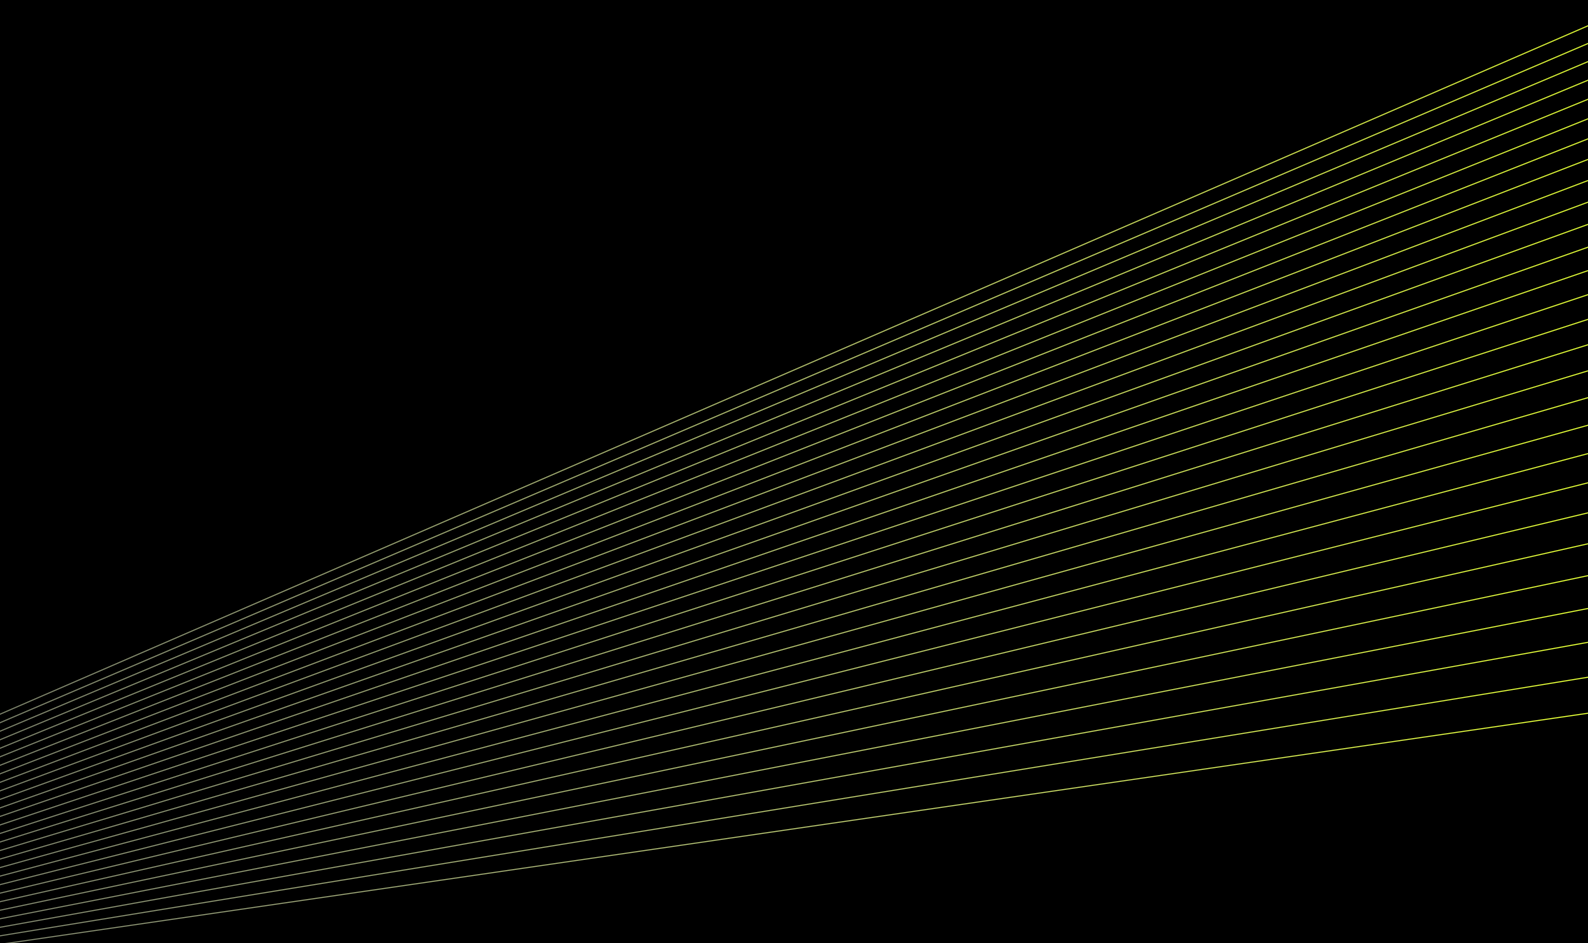



ENLIT

SELECTION 2018

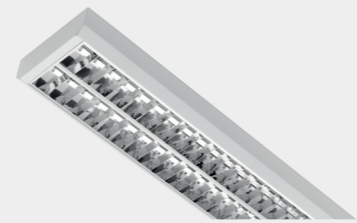

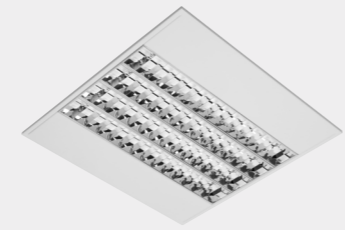

APPLICATIONS

- offices
- computer rooms
- classrooms
- banks
- CAD workplaces
- stores
- corridors
- hospitals

INSTALLATION TYPE

- RT600 – recessed luminaire, ceiling with visible T-profile, module 600x600
- SURFACE – mounting on solid surfaces

LIGHT SOURCES

- T5 - linear fluorescent lamp

OPTICAL SYSTEM

- PSL – polished, anodized, aluminium, double parabolic louvre with glare prevention
- PML – matt, anodized, aluminium, double parabolic louvre

ELECTRICAL EQUIPMENT

- ECG – electronic control gear
- ECG multi – electronic multi-watt control gear
- DIM 1-10V – electronic analogue dimmable control gear
- DSI – electronic digitally dimmable control gear
- DALI – electronic DALI dimmable control gear

OPTIONAL EQUIPMENT / ACCESSORIES

- lamps included in luminaire
- wired with emergency unit (1 or 3h)
- components for fast electrical connection (Wieland, Wago, Isodom)

VALUE FOR PRICE

- 1 high efficient double parabolic louvre
- 2 optical efficiency up to 85% (MIRO4)
- 3 „twin connection“ – possible to use 2 lamps in one louvre
- 4 any kind of customization possible (dimensions, air slots, colours, fast electrical connectors...etc.)
- 5 product fully manufactured and assembled in Slovakia

BASIC

Functional simplicity

LOUVERS MADE OF 0,4MM ANODISED ALUMINIUM ONLY

VERSIONS WITH MIRO ALUMINIUM, DALI VERSIONS

High efficient parabolic louvers (MIRO4, MIRO5) with dimmable control gears - exceptional price in comparison with competitors.


Luminaires from BASIC series represent the basic element for realization of interior illumination. Well-established fluorescent lamps, wide offer of optical systems, variable electronic equipment, solid construction and executions enabling different mounting styles, helps to realize all visions and requirements expected from general lighting.

BASIC II


1X3L RT600, 1X4L RT600




Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	3,5-6 kg

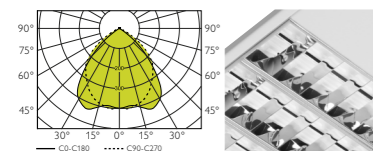


BASIC II 1x3L RT600 T5 3x14W PML MIRO5

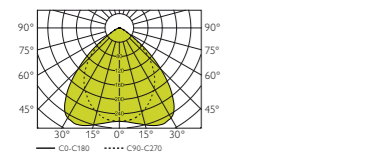

BASIC II 1x3L RT600 T5 3x14W PML

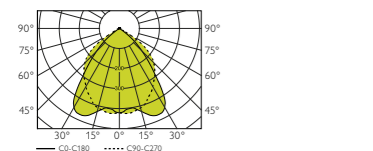

BASIC II 1x4L RT600 T5 4x14W PSL MIRO4

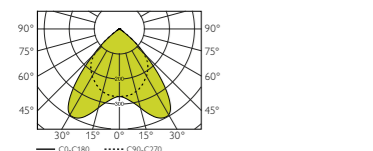

BASIC II 1x4L RT600 T5 4x14W PSL

Recessed luminaire for T5 lamps. Direct light distribution. Available with different optical systems. Equipped with polished, high efficient double parabolic louvre made of anodized aluminium, suitable for workplaces with display screen units (luminance of light emitting area is in compliance with EN 12464-1).

The louvre is fixed to housing with quick clamping springs. Housing of luminaire is made of sheet steel of thickness 0,6mm, bottom cover made of solid or perforated sheet (marking -P). Standard surface treatment – white powder coated colour (RAL 9003). Other execution of the louvre and other surface treatment is possible on request.

INSTALLATION TYPE

- RT600 – recessed luminaire, ceiling with visible T-profile, module 600x600
- installation in to another ceiling types on request

OPTICAL SYSTEM



- PSL (parabolic specular louvre) – polished, anodized, aluminium, double parabolic louvre with glare prevention
- PML (parabolic matt louvre) – matt, anodized, aluminium, double parabolic louvre

ELECTRICAL EQUIPMENT

- electronic control gear for one/two linear fluorescent lamps T5, lamp holders G5
- 3-pole screwless terminal block with strain relief, max. 2,5mm². Cable opening entry completed with cable gland, through wiring possibility.

OPTIONAL EQUIPMENT / ACCESSORIES

- lamps included in luminaire
- wired with multi-watt control gear
- wired with emergency unit (1 or 3h)
- wired with dimmable control gear (DIM 1-10V, DSI or DALI)
- components for fast electrical connection (Wieland, Isodom)

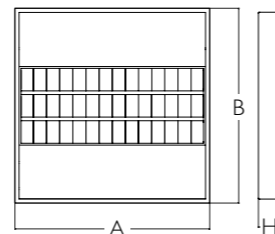

Type	A (mm)	B (mm)	H (mm)	kg
BASIC II 1x3L RT600 T5 3x14W	595	595	67	3,5
BASIC II 1x3L RT600 T5 3x24W	595	595	67	3,5
BASIC II 1x4L RT600 T5 4x14W	595	595	67	3,5
BASIC II 1x4L RT600 T5 4x24W	595	595	67	3,5
BASIC II 1x3L RT600 T5 3x28W	1195	595	67	6
BASIC II 1x3L RT600 T5 3x54W	1195	595	67	6
BASIC II 1x4L RT600 T5 4x28W	1195	595	67	6
BASIC II 1x4L RT600 T5 4x54W	1195	595	67	6

CODE	TYPE	SPECIFICATION
		control gear optics colour lamp emergency unit accessories
BA10RT600T53014	BASIC II 1x3L RT600 T5 3x14W	ECG PSL RAL 9003 14W/827, 14W/830, 14W/835, 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA10RT600T53024	BASIC II 1x3L RT600 T5 3x24W	ECG-MULTI PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA20RT600T54014	BASIC II 1x4L RT600 T5 4x14W	DIM 1-10V PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA20RT600T54024	BASIC II 1x4L RT600 T5 4x24W	DSI PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA10RT600T53028	BASIC II 1x3L RT600 T5 3x28W	DALI PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA10RT600T53054	BASIC II 1x3L RT600 T5 3x54W	Wieland 3p PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA20RT600T54028	BASIC II 1x4L RT600 T5 4x28W	Wago 3p PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965
BA20RT600T54054	BASIC II 1x4L RT600 T5 4x54W	Isodom PML RAL 9003 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965, 35W/827, 35W/830, 35W/835, 35W/840, 35W/865, 80W/827, 80W/830, 80W/835, 80W/840, 80W/865, 80W/880, 80W/940, 80W/965

BASIC II

range



BASIC II 1X1L RT600

Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	1,5-4,6 kg

DIMENSIONS:

595x106mm
1195x106mm
1495x106mm

POWER:

1x14/24W
1x28/54W
1x35/49/80W



BASIC II 1X4L RT600

Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	3,5-6 kg

DIMENSIONS:

595x595mm
1195x595mm
1495x595mm

POWER:

4x14/24W
4x28/54W
4x35/49/80W



BASIC II 2X1L RT600

Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	4,8-5,6 kg

DIMENSIONS:

595x295mm
1195x295mm
1495x295mm

POWER:

2x14/24W
2x28/54W
2x35/49/80W



BASIC ASYM SUR


Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	1,6-4,8 kg

DIMENSIONS:

606x122mm
1206x122mm
1506x122mm

POWER:

1x14/24W
1x28/54W
1x35/49/80W

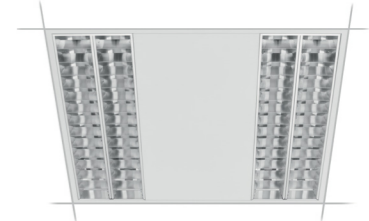

BASIC II 2X2L RT600


Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	5-6,3 kg

DIMENSIONS:

595x595mm
1195x595mm
1495x595mm

POWER:

4x14/24W
4x28/54W
4x35/49/80W

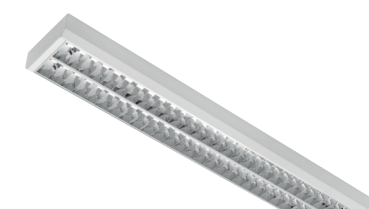

BASIC II 1X2L SUR

Lamp	T5
Lamp holder	G5
Class	I
Ingress protection	IP20
Weight	3,3-4,2 kg

DIMENSIONS:

608x202mm
1208x202mm
1508x202mm

POWER:

2x14/24W
2x28/54W
2x35/49/80W

enlighten your world

ENLIT spol. s r. o.

Priemyselná 1497/18b
905 01 Senica
Slovakia

T +421 905 556 800
T +421 915 089 654
E info@enlit.sk

www.enlit.sk