

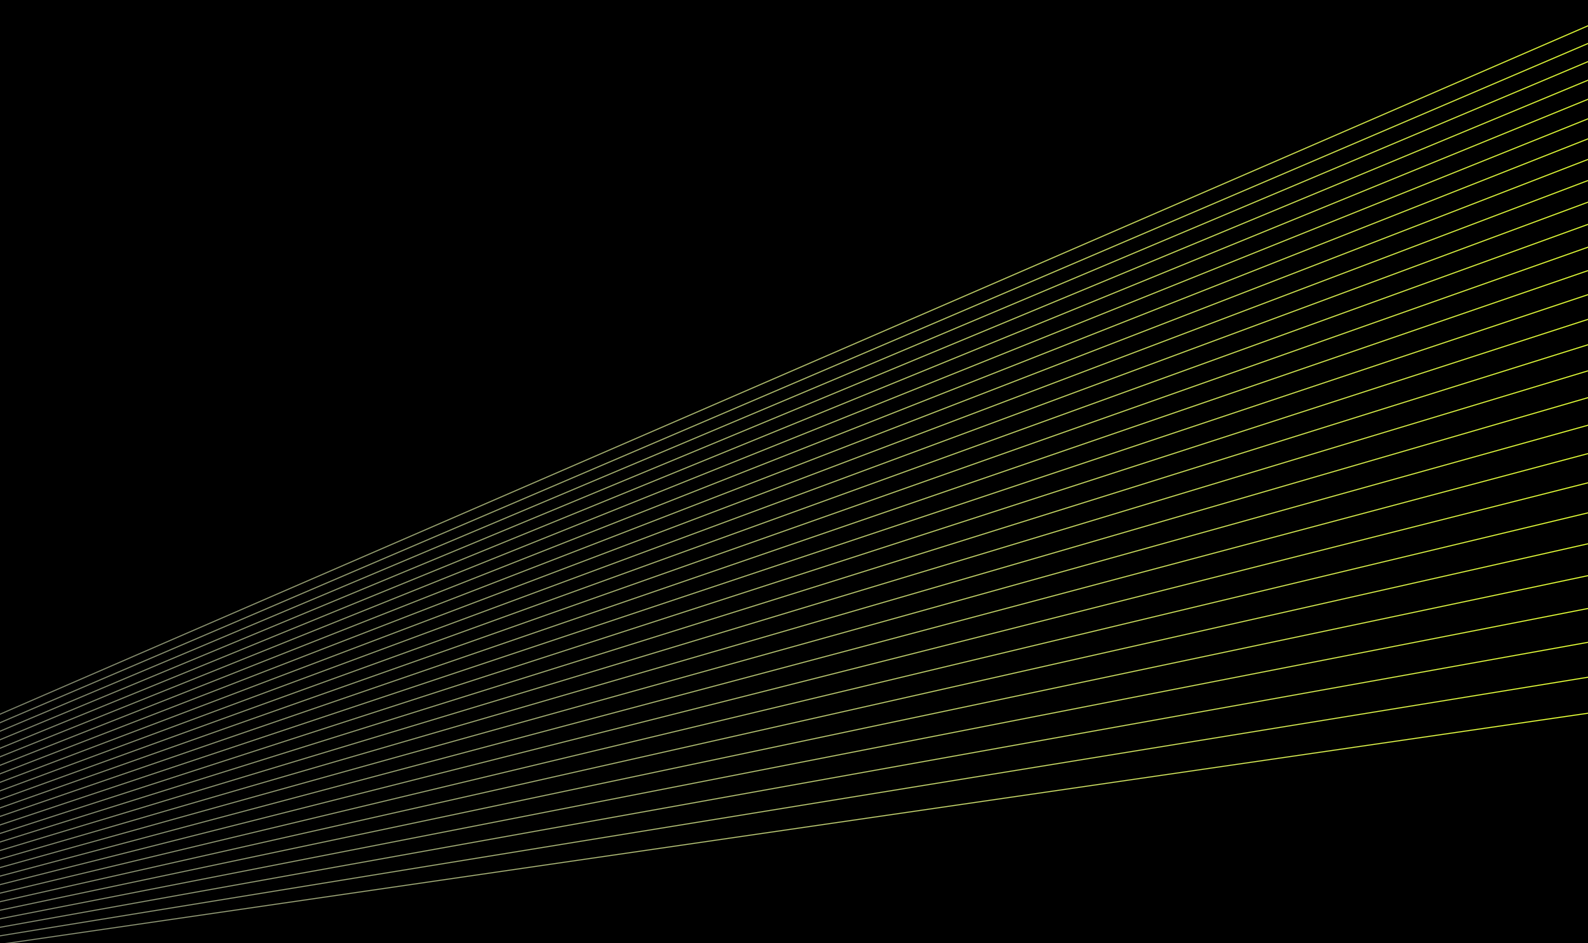


ENLIT

SELECTION 2018

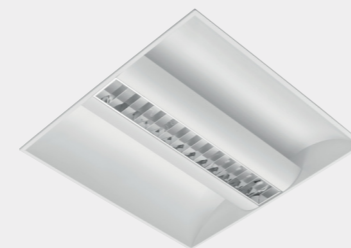

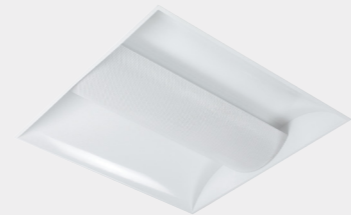

APPLICATIONS

- offices
- classrooms
- banks
- stores
- corridors
- hospitals

INSTALLATION TYPE

- RT600 – recessed luminaire, ceiling with exposed grids, module size 600x600
- R – recessed luminaire
- installation in to another ceiling types on request

LIGHT SOURCES

- T5 – linear fluorescent lamp
- TC-L – compact fluorescent lamp

ELECTRICAL EQUIPMENT

- ECG – electronic control gear
- DIM 1-10V – electronic analogue dimmable control gear
- DSI – electronic digitally dimmable control gear
- DALI – electronic DALI dimmable control gear

OPTIONAL EQUIPMENT / ACCESSORIES

- lamps included in luminaire
- wired with emergency unit (1 or 3h)
- components for fast electrical connection (Wieland, Wago, Isodom)

VALUE FOR PRICE

- 1 solid body made from 0,6mm sheet steel
- 2 price effective solution
- 3 „twin connection“ – possible to use 2 lamps in one louvre
- 4 „low“ versions, with decreased product height available
- 5 special version for continuous connection of optical system
- 6 special version for better illumination of walls - SOFT AL
- 7 product fully manufactured and assembled in Slovakia

SOFT

Without hard shadows

VERSION FOR PLASTERBOARD INSTALLATION

Exceptional price on the market - thanks to the special construction and installation brackets, versions for plasterboard installation are able to keep the low price.

Luminaires from SOFT product range are aimed to any place, where is a need for non-glaring, pleasant, "soft" basic illumination without hard shadows.

Harmonious brightness distribution on surfaces of the room, high portion of vertical illumination and uniform horizontal illumination helps to model objects in space and improves visual comfort of users.

VERSIONS WITH MIRO ALUMINIUM

Soft with high efficient parabolic louvers - exceptional price in comparison with competitors.

VERSIONS WITH DIMMABLE CONTROL GEARS

Exceptional price in comparison with competitors.



SOFT


SL RT600



Recessed luminaire with parabolic louvre for TC-L and T5 lamps with direct lighting characteristics. Combined distribution of luminous flux ensures glare-free illumination without big contrasts, ideal for application with high demand for visual comfort.

Minimalistic shades increase efficiency of lighting fixture. Housing of luminaire is made of sheet steel of thickness 0,6mm. Standard surface treatment - white powder coated colour (RAL 9003).

Lamp	TC-L/T5
Lamp holder	2G11/G5
Class	I
Ingress protection	IP20
Weight	4,7 - 9,1 kg

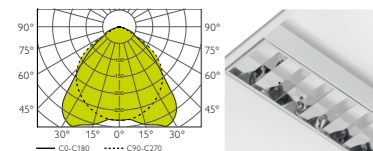

SOFT VL1 RT600 T5 3x14W



INSTALLATION TYPE


- RT600 – recessed luminaire, ceiling with exposed grids, module size 600x600
- R – recessed luminaire
- installation in to another ceiling types on request

OPTICAL SYSTEM

- PSL (parabolic specular louvre) – polished, anodized, aluminium, double parabolic louvre with glare prevention
- PML (parabolic matt louvre) – matt, anodized, aluminium, double parabolic louvre

ELECTRICAL EQUIPMENT

- electronic control gear for fluorescent lamps TC-L/T5
- lamp holders 2G11/G5
- 3-pole screwless terminal block with strain relief, max. 2,5mm²
- cable opening entry completed with cable gland
- through wiring possibility

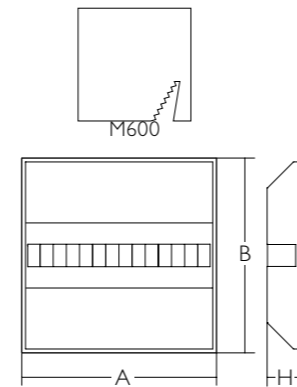

Type	A (mm)	B (mm)	H (mm)	kg
SOFT SL RT600 TC-L 1x40W	595	595	101	4,7
SOFT SL RT600 TC-L 1x55W	595	595	101	4,7
SOFT SL RT600 T5 2x14W	595	595	101	4,7
SOFT SL RT600 T5 2x24W	595	595	101	4,7
SOFT SL RT600 T5 2x28W	1195	595	101	9,1
SOFT SL RT600 T5 2x54W	1195	595	101	9,1

CODE	TYPE	SPECIFICATION
		control gear
		optics
		colour
		lamp
		emergency unit
		accessories
SO80RT60TCL1040	SOFT SL RT600 TC-L 1x40W	ECG
SO80RT60TCL1055	SOFT SL RT600 TC-L 1x55W	DIM 1-10V
SO80RT600T52014	SOFT SL RT600 T5 2x14W	DSI
SO80RT600T52024	SOFT SL RT600 T5 2x24W	DALI
SO80RT600T52028	SOFT SL RT600 T5 2x28W	
SO80RT600T52054	SOFT SL RT600 T5 2x54W	
		Wieland 3p
		Wago 3p
		Isodom
		M 3h
		40W/827, 40W/830, 40W/840, 40W/865, 40W/954, 55W/827, 55W/830, 55W/840, 55W/865, 55W/930, 55W/940, 55W/954, 14W/827, 14W/830, 14W/835, 14W/840, 14W/865, 24W/827, 24W/830, 24W/835, 24W/840, 24W/865, 24W/880, 24W/940, 24W/965, 28W/827, 28W/830, 28W/835, 28W/840, 28W/865, 54W/827, 54W/830, 54W/835, 54W/840, 54W/865, 54W/880, 54W/940, 54W/965


SOFT

range




SOFT V01 RT600

Lamp	TC-L
Lamp holder	2G11
Class	I
Ingress protection	IP20
Weight	4,7 kg

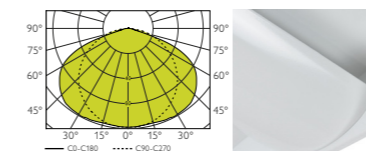

SOFT V01 RT600 TC-L 2x40W

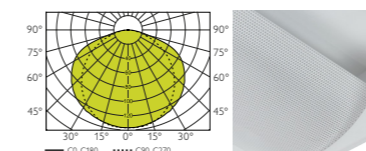


SOFT V01-P RT600 TC-L 2x40W




SOFT VL RT600


Lamp	TC-L/T5
Lamp holder	2G11/G5
Class	I
Ingress protection	IP20
Weight	4,7 - 9,1 kg

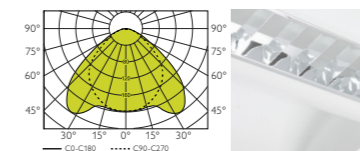


SOFT VL1 RT600 T5 3x14W

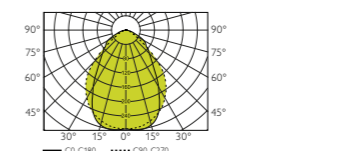


SOFT VL1-P RT600 TC-L 1x40W



L1




L2

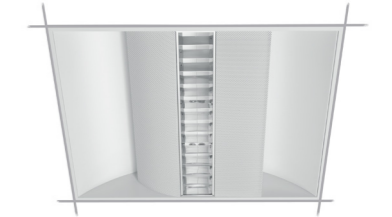


SOFT AL RT600


Lamp	TC-L/T5
Lamp holder	2G11/G5
Class	I
Ingress protection	IP20
Weight	4,7 - 9,1 kg

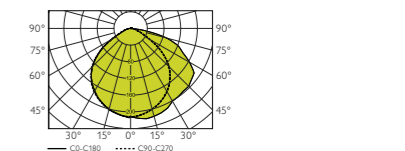

SOFT AL2 RT600 T5 2x24W



L1



L2

enlighten your world

ENLIT spol. s r. o.

Priemyselná 1497/18b
905 01 Senica
Slovakia

T +421 905 556 800
T +421 915 089 654
E info@enlit.sk

www.enlit.sk